

# CELANEX® 2302 GV1/15

## CELANEX® PBT

Chemical abbreviation according to ISO 1043-1: PBT Moulding compound ISO 7792- PBT+PET, MGHR, 08-060N, GF15; Polybutylene terephthalate polymer blend with PET, 15 % glass fibre reinforced, injection molded parts with superior gloss. Flammability UL 94 HB minimum thickness 0.85 mm. Recognition by Underwriters Laboratories, USA (UL)

### Product information

|                      |                  |           |
|----------------------|------------------|-----------|
| Resin Identification | (PBT+PET)-GF1    | ISO 1043  |
|                      | 5                |           |
| Part Marking Code    | >(PBT+PET)-GF15< | ISO 11469 |

### Rheological properties

|                                    |                           |                 |
|------------------------------------|---------------------------|-----------------|
| Melt volume-flow rate              | 20 cm <sup>3</sup> /10min | ISO 1133        |
| Temperature                        | 265 °C                    |                 |
| Load                               | 2.16 kg                   |                 |
| Viscosity number                   | 105 cm <sup>3</sup> /g    | ISO 307, 1628   |
| Moulding shrinkage range, parallel | 0.4 - 0.6 %               | ISO 294-4, 2577 |
| Moulding shrinkage range, normal   | 0.8 - 1 %                 | ISO 294-4, 2577 |

### Typical mechanical properties

|                                       |                       |              |
|---------------------------------------|-----------------------|--------------|
| Tensile modulus                       | 6200 MPa              | ISO 527-1/-2 |
| Tensile stress at break, 5mm/min      | 115 MPa               | ISO 527-1/-2 |
| Tensile strain at break, 5mm/min      | 3.5 %                 | ISO 527-1/-2 |
| Flexural strength                     | 160 MPa               | ISO 178      |
| Flexural strain at failure            | 3 %                   | ISO 178      |
| Tensile creep modulus, 1h             | 5300 MPa              | ISO 899-1    |
| Tensile creep modulus, 1000h          | 4300 MPa              | ISO 899-1    |
| Charpy impact strength, 23°C          | 35 kJ/m <sup>2</sup>  | ISO 179/1eU  |
| Charpy impact strength, -30°C         | 35 kJ/m <sup>2</sup>  | ISO 179/1eU  |
| Charpy notched impact strength, 23°C  | 6.5 kJ/m <sup>2</sup> | ISO 179/1eA  |
| Charpy notched impact strength, -30°C | 6.5 kJ/m <sup>2</sup> | ISO 179/1eA  |
| Ball indentation hardness, H 961/30   | 190 MPa               | ISO 2039-1   |
| Poisson's ratio                       | 0.35 <sup>[C]</sup>   |              |

[C]: Calculated

### Thermal properties

|                                                          |               |                |
|----------------------------------------------------------|---------------|----------------|
| Melting temperature, 10°C/min                            | 255 °C        | ISO 11357-1/-3 |
| Temperature of deflection under load, 1.8 MPa            | 190 °C        | ISO 75-1/-2    |
| Temperature of deflection under load, 8 MPa              | 65 °C         | ISO 75-1/-2    |
| Vicat softening temperature, 50°C/h 50N                  | 210 °C        | ISO 306        |
| Coefficient of linear thermal expansion (CLTE), parallel | 35 E-6/K      | ISO 11359-1/-2 |
| Thermal conductivity of melt                             | 0.15 W/(m K)  | ISO 22007-2    |
| Specific heat capacity of melt                           | 1820 J/(kg K) | ISO 22007-4    |

# CELANEX® 2302 GV1/15

## CELANEX® PBT

### Flammability

|                                      |          |                 |
|--------------------------------------|----------|-----------------|
| Burning Behav. at 1.5mm nom. thickn. | HB class | IEC 60695-11-10 |
| Thickness tested                     | 1.4 mm   | IEC 60695-11-10 |
| Burning Behav. at thickness h        | HB class | IEC 60695-11-10 |
| Thickness tested                     | 0.85 mm  | IEC 60695-11-10 |
| UL recognition                       | yes      | UL 94           |
| Oxygen index                         | 19 %     | ISO 4589-1/-2   |

### Electrical properties

|                              |             |               |
|------------------------------|-------------|---------------|
| Relative permittivity, 100Hz | 4.1         | IEC 62631-2-1 |
| Relative permittivity, 1MHz  | 4           | IEC 62631-2-1 |
| Dissipation factor, 100Hz    | 12 E-4      | IEC 62631-2-1 |
| Dissipation factor, 1MHz     | 180 E-4     | IEC 62631-2-1 |
| Volume resistivity           | >1E13 Ohm.m | IEC 62631-3-1 |
| Surface resistivity          | >1E15 Ohm   | IEC 62631-3-2 |
| Electric strength            | 28 kV/mm    | IEC 60243-1   |
| Comparative tracking index   | 250         | IEC 60112     |

### Physical/Other properties

|                          |                        |                |
|--------------------------|------------------------|----------------|
| Humidity absorption, 2mm | 0.15 %                 | Sim. to ISO 62 |
| Water absorption, 2mm    | 0.45 %                 | Sim. to ISO 62 |
| Density                  | 1430 kg/m <sup>3</sup> | ISO 1183       |
| Density of melt          | 1220 kg/m <sup>3</sup> |                |

### Injection

|                                 |               |
|---------------------------------|---------------|
| Drying Recommended              | yes           |
| Drying Temperature              | 120 °C        |
| Drying Time, Dehumidified Dryer | 4 h           |
| Processing Moisture Content     | ≤0.02 %       |
| Melt Temperature Optimum        | 260 °C        |
| Min. melt temperature           | 255 °C        |
| Max. melt temperature           | 275 °C        |
| Screw tangential speed          | 0.1 - 0.3 m/s |
| Mold Temperature Optimum        | 100 °C        |
| Min. mould temperature          | 90 °C         |
| Max. mould temperature          | 130 °C        |
| Ejection temperature            | 218 °C        |

### Characteristics

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Processing              | Injection Moulding                            |
| Delivery form           | Pellets                                       |
| Additives               | Release agent                                 |
| Special characteristics | Heat stabilised or stable to heat, High Gloss |

# CELANEX® 2302 GV1/15

## CELANEX® PBT

### Additional information

Injection molding

### Preprocessing

To avoid hydrolytic degradation during processing, CELANEX resins have to be dried to a moisture level equal to or less than 0,02%. The drying should be done in a dry-air dryer (dew point < -30 °C) with a temperature of 120 to 140 °C and a drying time of 2 to 4 hours. In case of longer residence times in the dry-air dryer, the temperature should be reduced to 100 °C.

The time between drying and processing should be kept as short as possible. The processing machine feed hopper should be closed during the processing operation.

### Processing

Melt Temperature 265-275 °C  
Mold Temperature \*) 90-100 °C  
Maximum Barrel Residence Time \*\*) 5-10 min  
Injection Speed fast  
Peripheral screw speed max. 0,3 m/sec  
Back Pressure 10-30 bar  
Injection Pressure 600-1000 bar  
Holding Pressure 400-800 bar  
Nozzle Design open design preferred

Injection speed, injection pressure and holding pressure have to be optimized to the individual article geometry. To avoid material degradation during processing low back pressure and minimum screw speed have to be used. Overheating of the material has to be avoided.

Celanese recommends only externally heated hot runner systems.

\*) For moulded parts with especially high requirements to the surface quality or dimensional stability, a mold temperature of up to 110 °C can be advantageous.

\*\*) If the cylinder temperatures are higher than the recommended maximum temperatures, the max. residence time in the barrel has to be reduced.

### Processing Notes

### Pre-Drying

CELANEX should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be ≤ - 30 ° C. The time between drying and processing should be as short as possible.

### Storage

For subsequent storage of the material in the dryer until processed (≤ 60 h) it is necessary to lower the temperature to 100 ° C.

# CELANEX® 2302 GV1/15

CELANEX® PBT

## Automotive

OEM

Bosch

Bosch

STANDARD

N28 BN08-GF009


N28 BN08-GF009

ADDITIONAL INFORMATION

Natural

Black


## Viscosity-shear rate

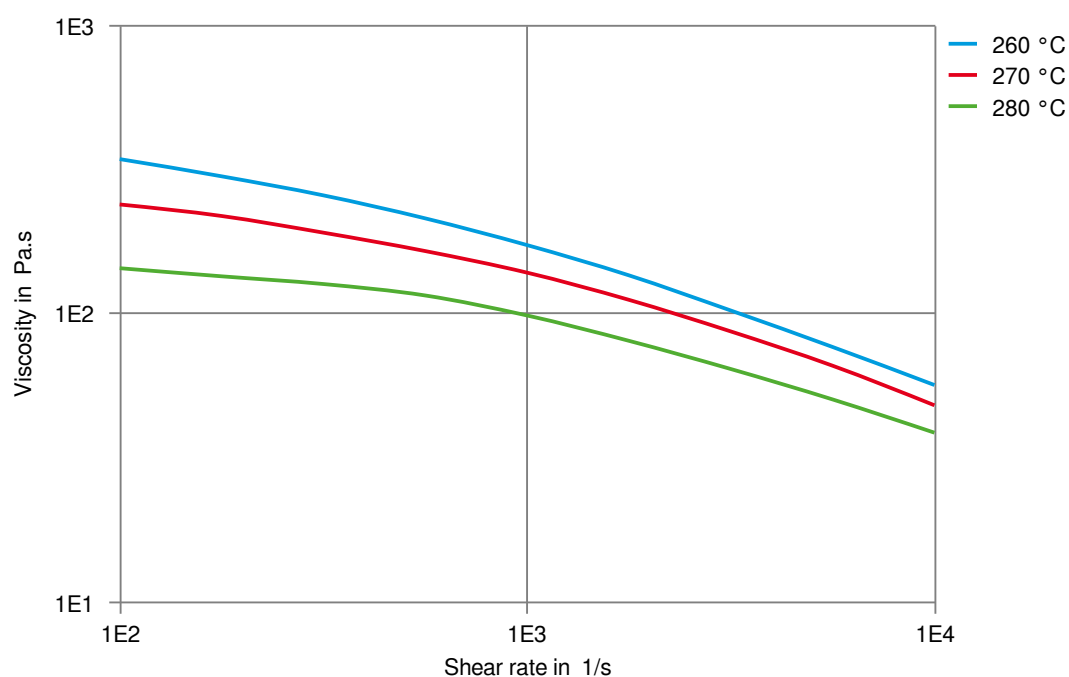

# CELANEX® 2302 GV1/15

CELANEX® PBT


Shearstress-shear rate

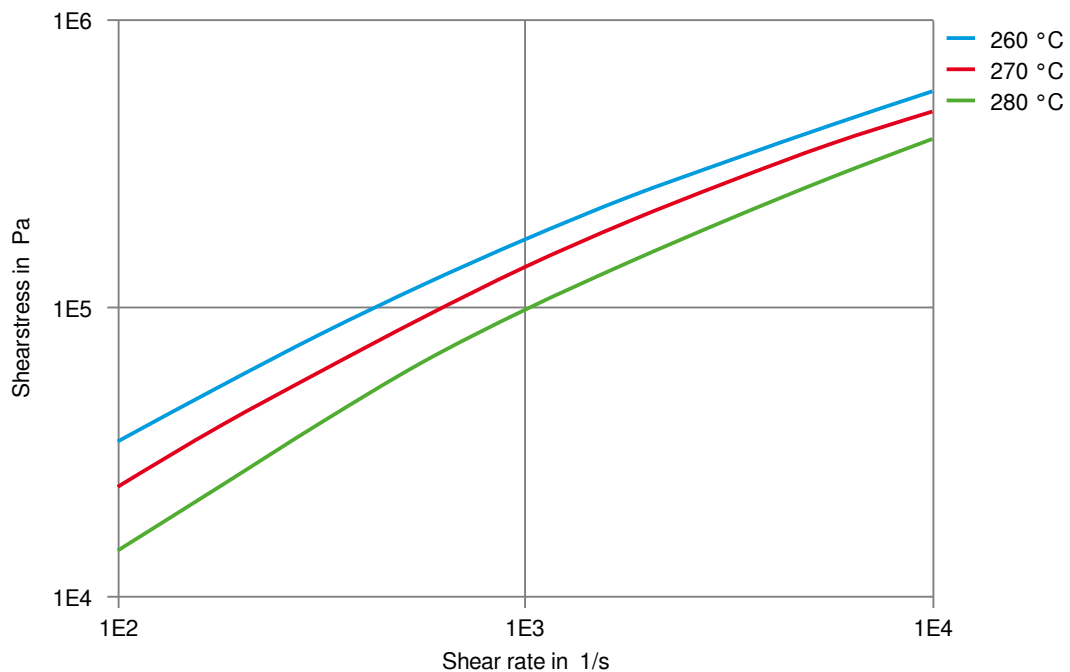

# CELANEX® 2302 GV1/15

CELANEX® PBT


## Stress-strain

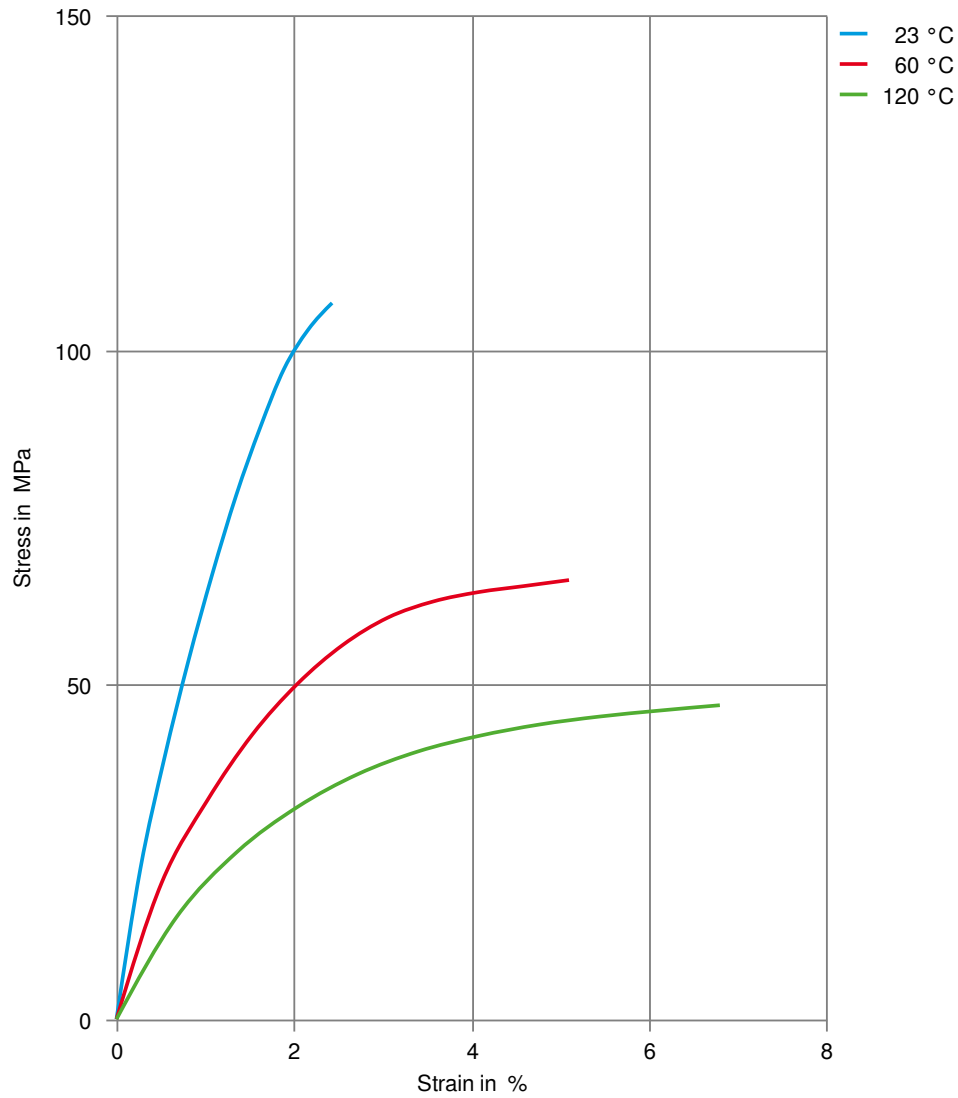

# CELANEX® 2302 GV1/15

CELANEX® PBT


## Secant modulus-strain

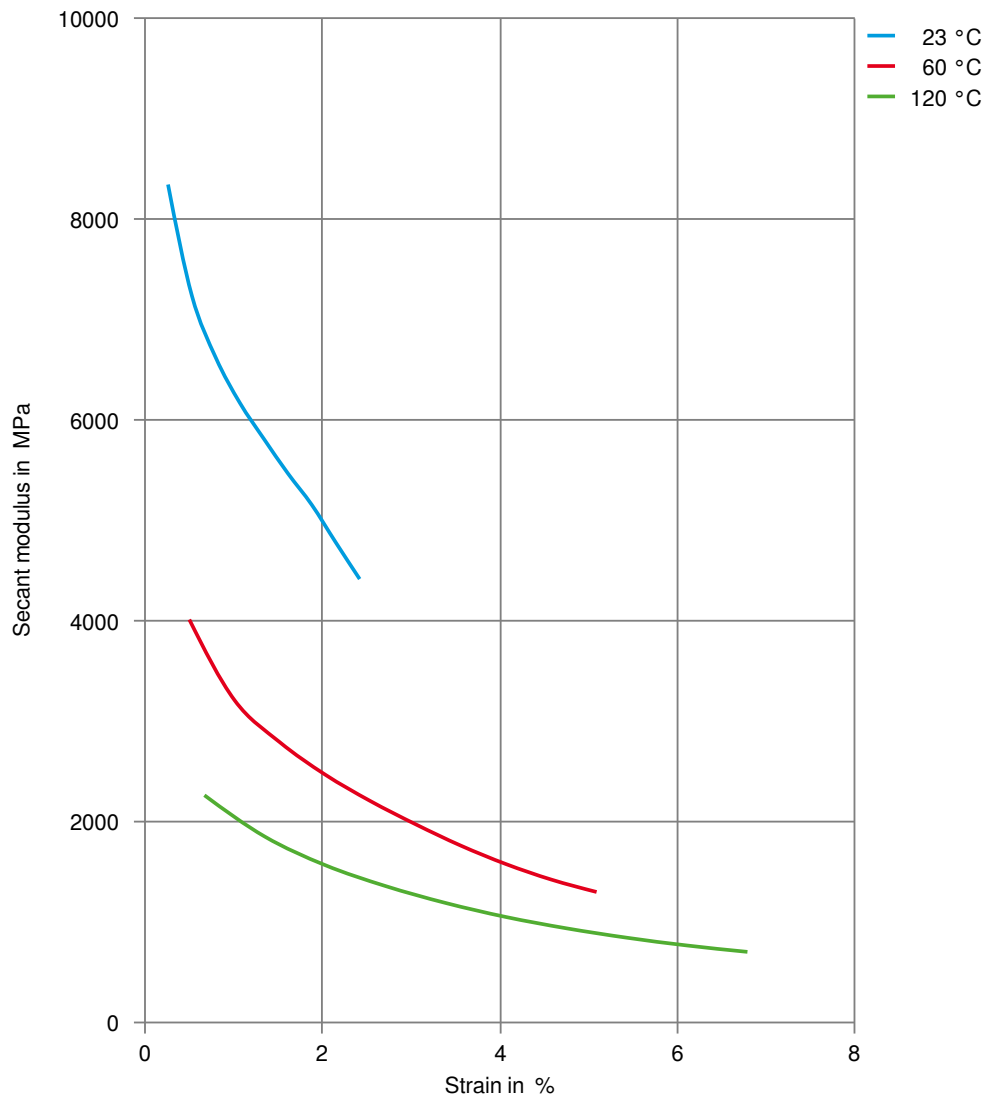

# CELANEX® 2302 GV1/15

CELANEX® PBT

Stress-strain (isochronous) 23°C

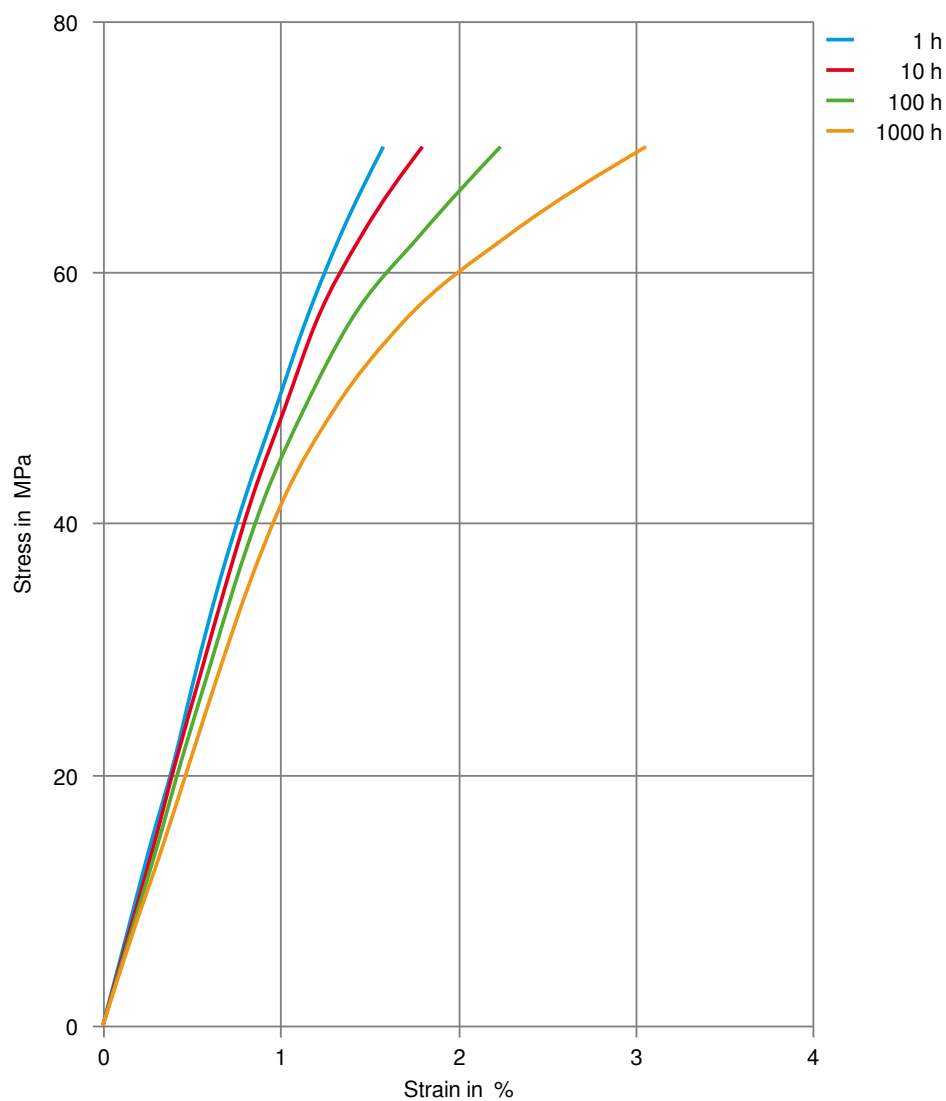




# CELANEX® 2302 GV1/15

CELANEX® PBT


Creep modulus-time 23°C

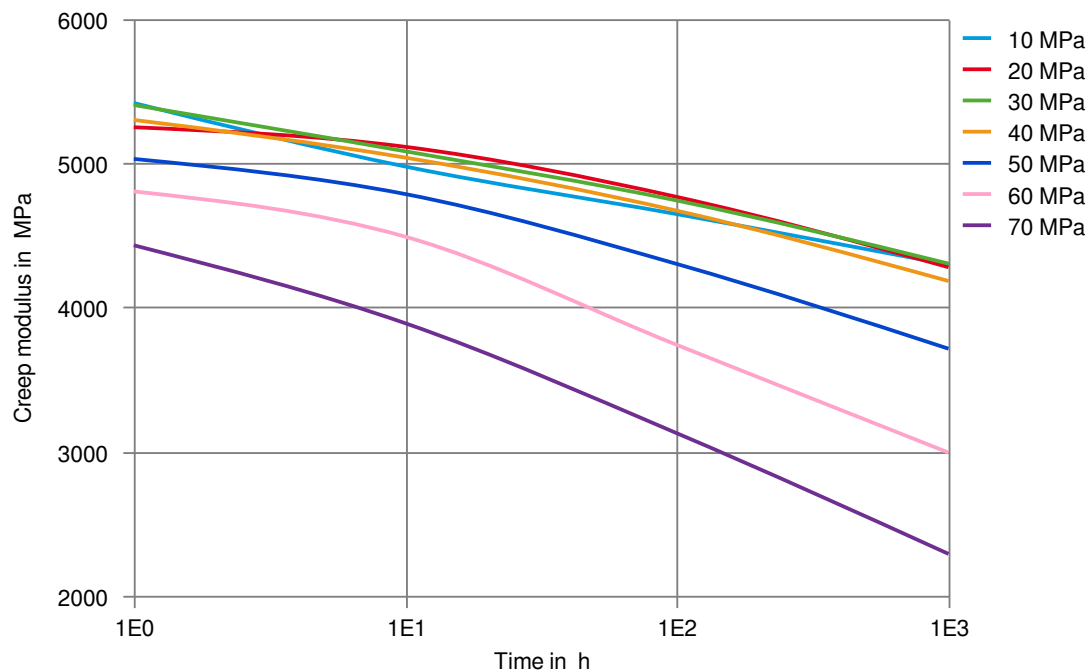

# CELANEX® 2302 GV1/15

CELANEX® PBT


Stress-strain (isochronous) 60°C

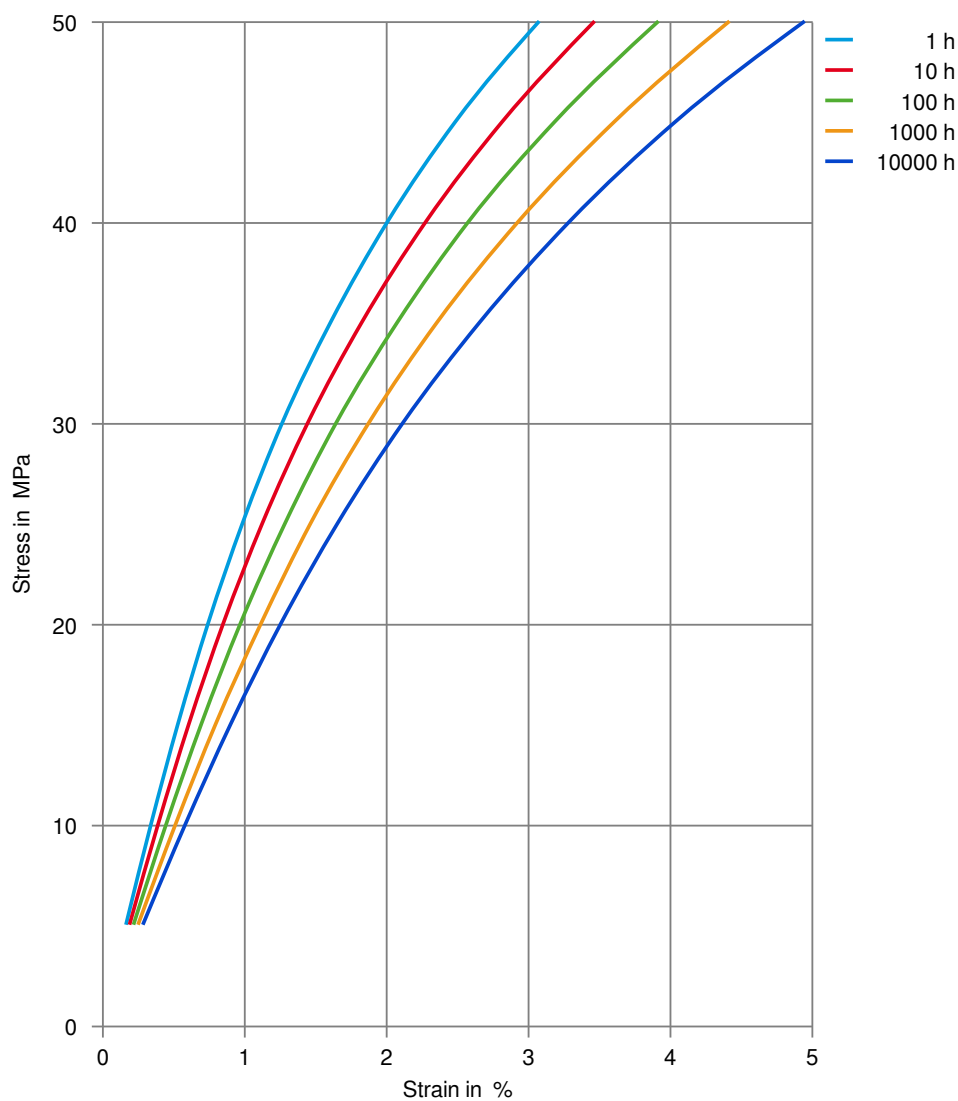

# CELANEX® 2302 GV1/15

CELANEX® PBT

Creep modulus-time 60°C

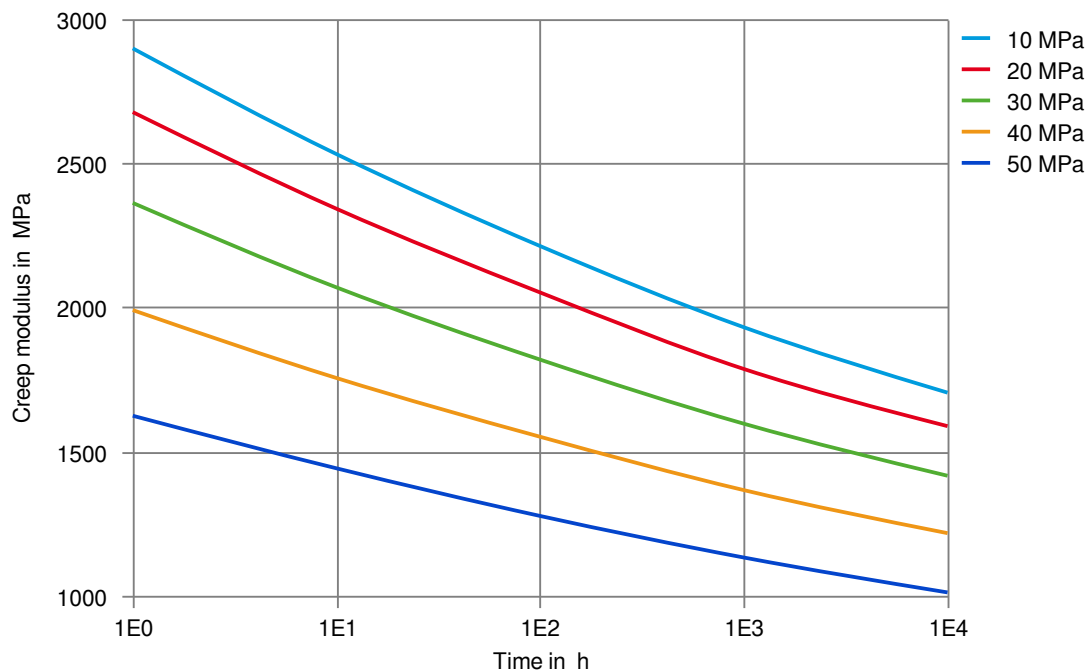

Printed: 2025-05-30

Page: 11 of 11

Revised: 2025-05-16 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2025 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.