

Rynite® FR515 BK507

THERMOPLASTIC POLYESTER RESIN

Common features of Rynite® thermoplastic polyester include mechanical and physical properties such as excellent balance of strength and stiffness, dimensional stability, creep resistance, heat resistance, high surface gloss and good inherent electrical properties at elevated temperature. It can be processed over a broad temperature range and has excellent flow properties.

Rynite® thermoplastic polyester resins are typically used in demanding applications in the automotive, electrical and electronics, appliances where they successfully replace metals and thermosets, as well as other thermoplastic polymers.

Rynite® FR515 BK507 is a 15% glass reinforced, flame retardant modified polyethylene terephthalate resin.

Product information

Resin Identification	PET- GF15FR(17)	ISO 1043
Part Marking Code	>PET-GF15FR(17)<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.3 ^[DS] %	ISO 294-4, 2577
Moulding shrinkage, normal	0.8 ^[DS] %	ISO 294-4, 2577
[DS]: Derived from similar grade		

Typical mechanical properties

Tensile modulus	6140 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	100 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.2 %	ISO 527-1/-2
Flexural modulus	6000 MPa	ISO 178
Flexural strength	160 MPa	ISO 178
Charpy impact strength, 23°C	32 kJ/m ²	ISO 179/1eU
Charpy impact strength, -40°C	20 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6.2 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	6 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.35	

Thermal properties

Melting temperature, 10°C/min	254 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	200 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	238 °C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel, -40-23°C	33 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	29 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	19 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	74 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	95 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	125 E-6/K	ISO 11359-1/-2
RTI, electrical, 0.75mm	140 °C	UL 746B
RTI, electrical, 1.5mm	140 °C	UL 746B
RTI, electrical, 3.0mm	140 °C	UL 746B

Rynite® FR515 BK507

THERMOPLASTIC POLYESTER RESIN

RTI, impact, 0.75mm	140 °C	UL 746B
RTI, impact, 1.5mm	140 °C	UL 746B
RTI, impact, 3.0mm	140 °C	UL 746B
RTI, strength, 0.75mm	140 °C	UL 746B
RTI, strength, 1.5mm	140 °C	UL 746B
RTI, strength, 3.0mm	140 °C	UL 746B

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	0.86 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. 5V at thickness h	5VA class	IEC 60695-11-20
Thickness tested	1.5 mm	IEC 60695-11-20
UL recognition	yes	UL 94
Oxygen index	32 %	ISO 4589-1/-2
Glow Wire Flammability Index, 3.0mm	960 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 3.0mm	900 °C	IEC 60695-2-13
FMVSS Class	DNI	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	3.6	IEC 62631-2-1
Relative permittivity, 1MHz	3.5	IEC 62631-2-1
Dissipation factor, 100Hz	229 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	123 E-4	IEC 62631-2-1
Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E13 Ohm	IEC 62631-3-2
Electric strength	40 kV/mm	IEC 60243-1
Comparative tracking index	225	IEC 60112
Comparative tracking index, 23°C	3 PLC	UL 746A

Physical/Other properties

Density	1550 kg/m³	ISO 1183
---------	------------	----------

Injection

Drying Recommended	yes
Drying Temperature	120 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.02 ^[1] %
Melt Temperature Optimum	280 °C
Min. melt temperature	270 °C
Max. melt temperature	290 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	102 °C
Min. mould temperature	95 °C
Max. mould temperature	110 ^[2] °C
Hold pressure range	≥80 MPa
Hold pressure time	4 s/mm
Back pressure	As low as possible

Rynite® FR515 BK507

THERMOPLASTIC POLYESTER RESIN

Ejection temperature

202 °C

[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.

[2]: (6mm - 1mm thickness)

Characteristics

Processing

Injection Moulding


Additives

Flame retardant

Special characteristics

Flame retardant


Stress-strain (measured on Rynite® FR515 NC010)

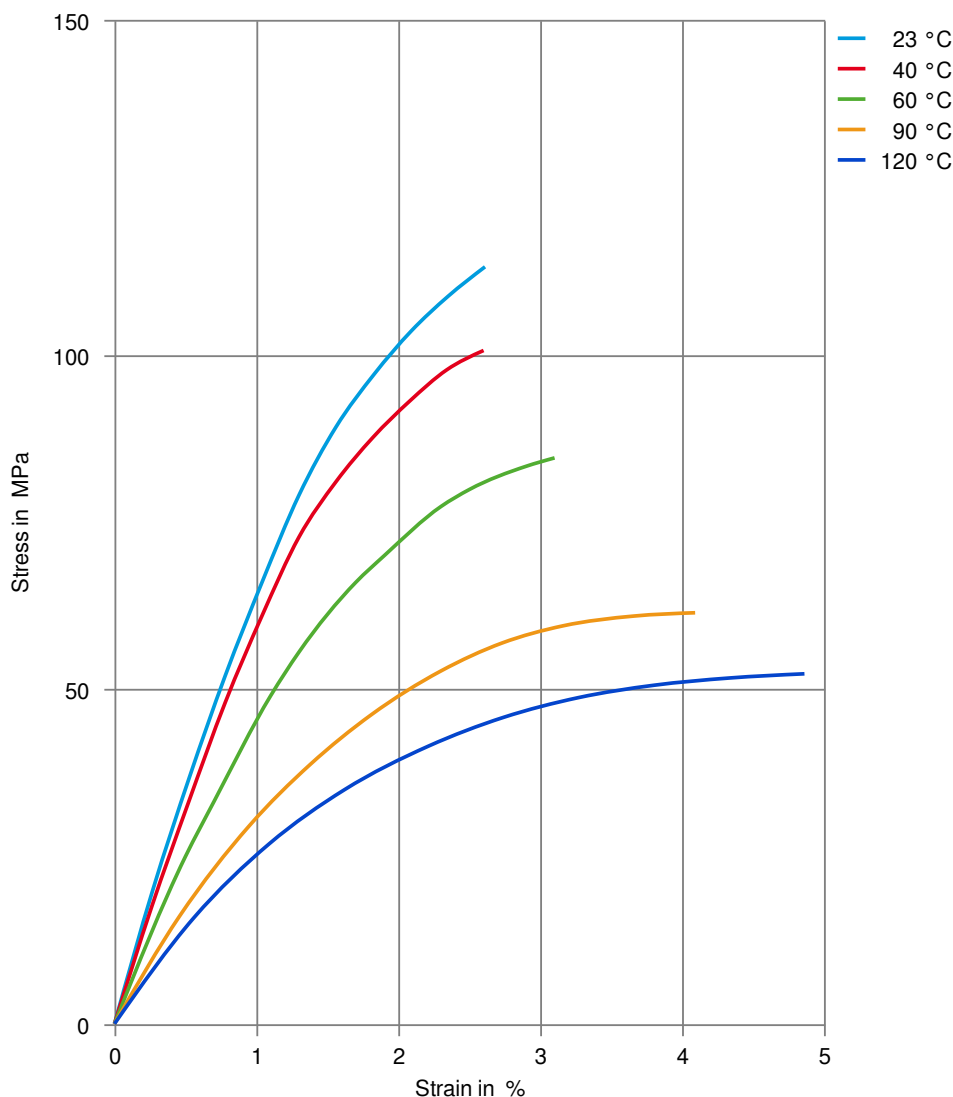

Rynite® FR515 BK507

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain
(measured on Rynite® FR515 NC010)

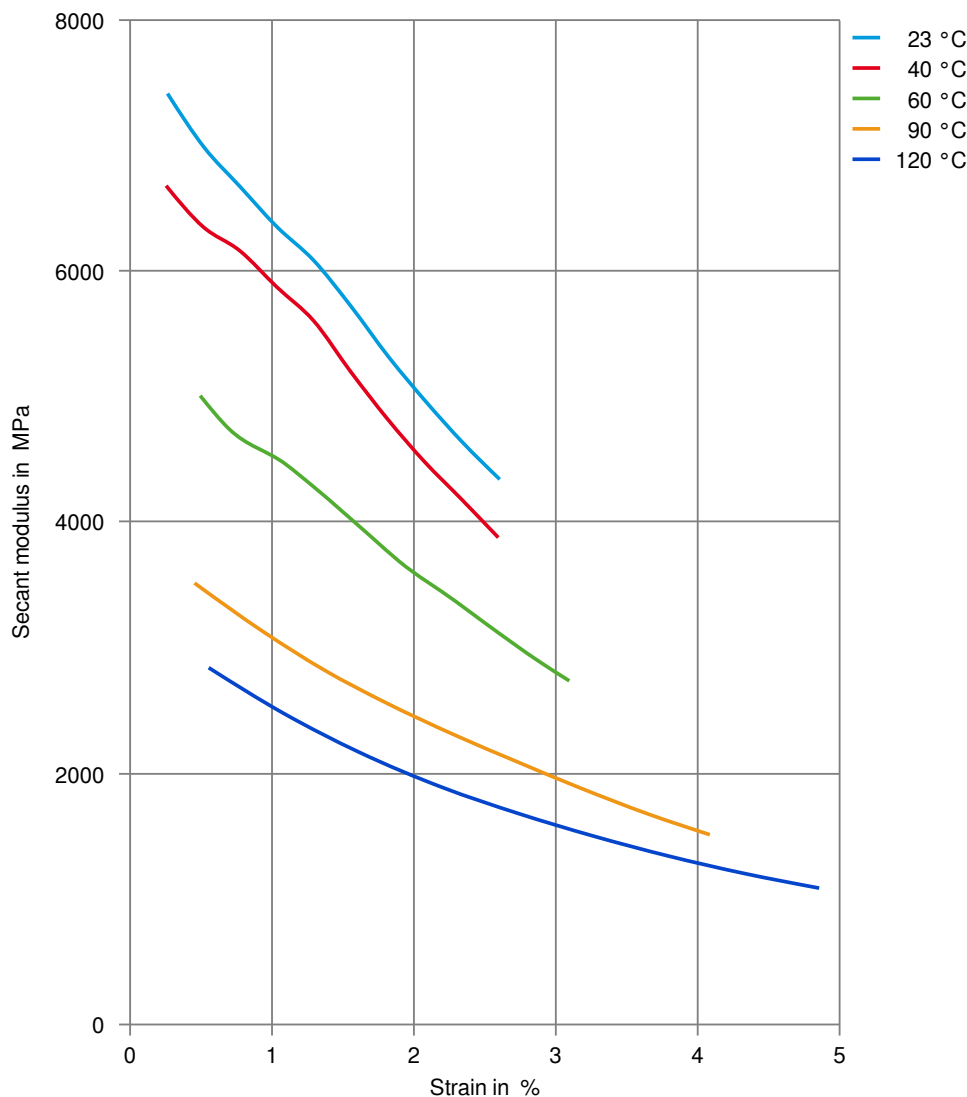

Printed: 2025-05-30

Page: 4 of 4

Revised: 2025-04-21 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2025 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC.