










ABS – injection moulding portfolio


Novodur P2H-AT 37 16 2500 95	Novodur P2M-AT 22 23 2300 98	Lustran ABS M406 10 29 1800 92	Lustran ABS M201AS 18 20 2400 98 CR	Novodur P3H-AT 12 18 2500 96 CR	Novodur P2M-V 25 23 2200 95 LE	Lustran ABS M305 12 21 2300 99	Novodur P2MC 25 23 2200 95
Novodur P2HGV 3 7 5500 105	Lustran ABS M203FC 31 15 2400 99	Lustran ABS M205FC 20 15 2550 98	Lustran ABS M301FC 18 21 2100 99	Lustran ABS H604 8 22 2400 102 CR	Lustran ABS H605 25 17 2400 101 LE	Lustran ABS H606LS 12 19 2550 101	Lustran ABS H607AS 15 19 2400 100
Lustran ABS H701 8 24 2150 104	Lustran ABS H702 16 17 2500 104	Lustran ABS H801 9 30 2400 105 LE	Lustran ABS H802 8 15 2700 109	Lustran ABS H950 4 17 2600 113	Lustran Ultra 4105 14* 42 2000 105 LE	Lustran Ultra 4115 15* 40 2250 116	Lustran Ultra 4000PG 7 23 2400 107

 General moulding	 Glass fiber reinforced	 High performance
 Smart cards	 Medical	 Increased chemical resistance
 Electroplating	 High heat	 Low emission

Properties	
MVR 220/10 / MVR 260/5 *	cm ³ /10 min]
Izod not. 23 °C	[kJ/m ²]
Tensile Modulus	[MPa]
Vicat B50	[°C]

INEOS ABS


ABS – extrusion portfolio

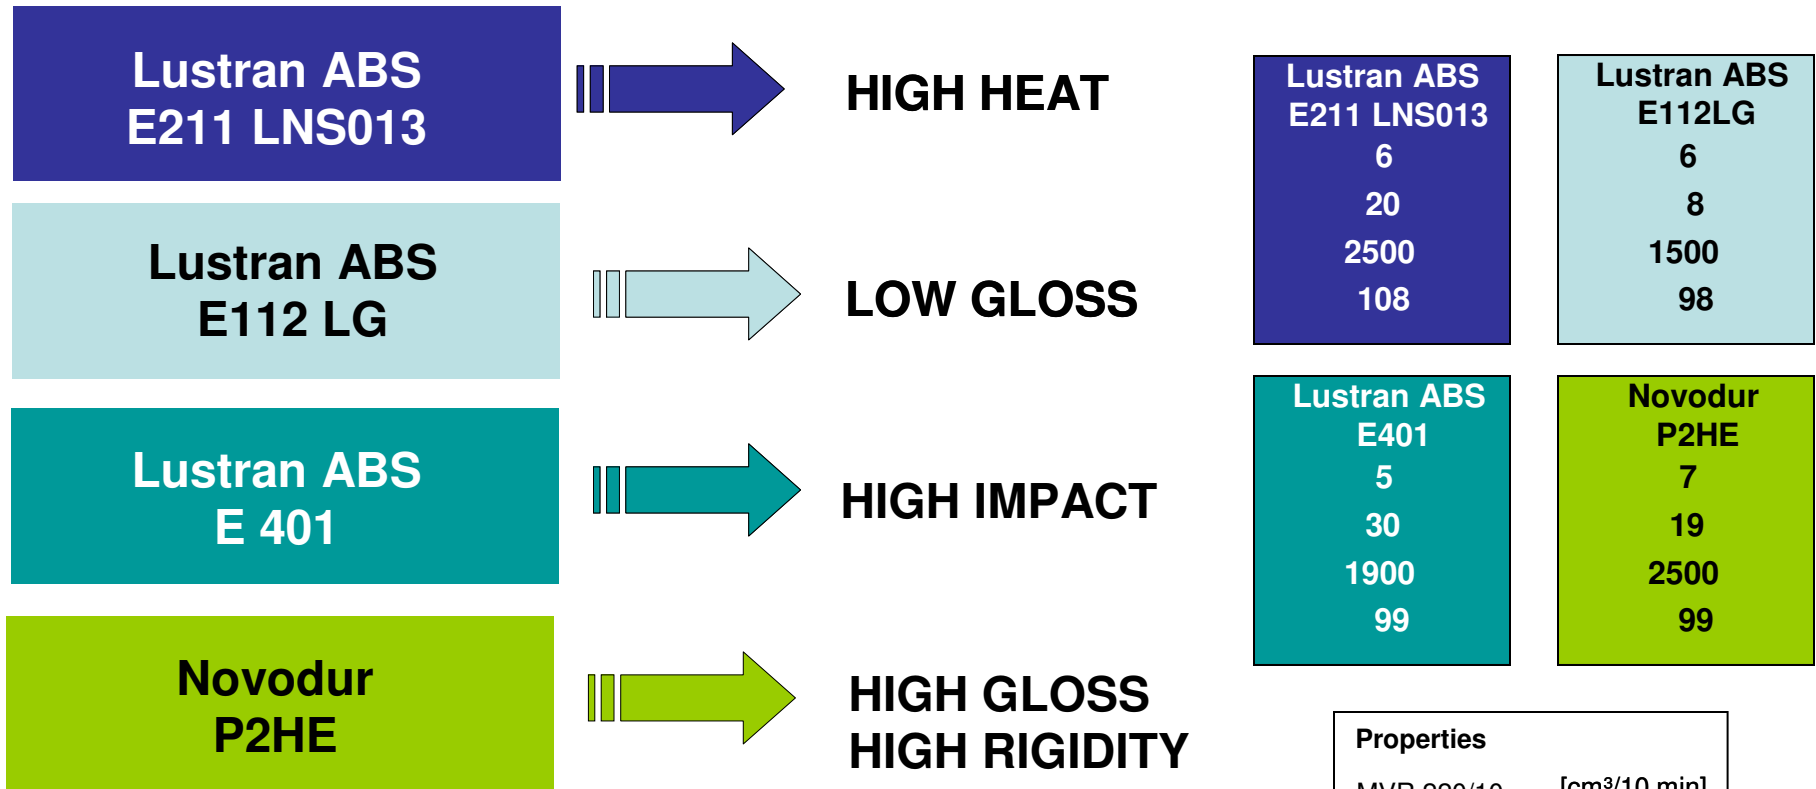


Properties	
MVR 220/10	[cm ³ /10 min]
Izod not.23 °C	[kJ/m ²]
Tensile Modulus	[MPa]
Vicat B50	[°C]

Triax – portfolio

STANDARD

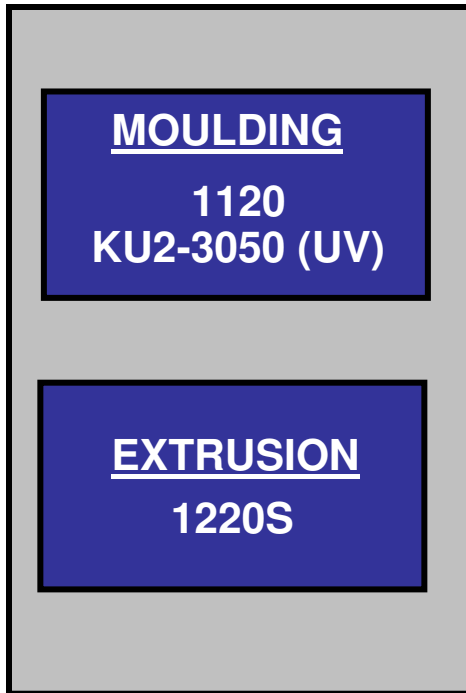

REINFORCED

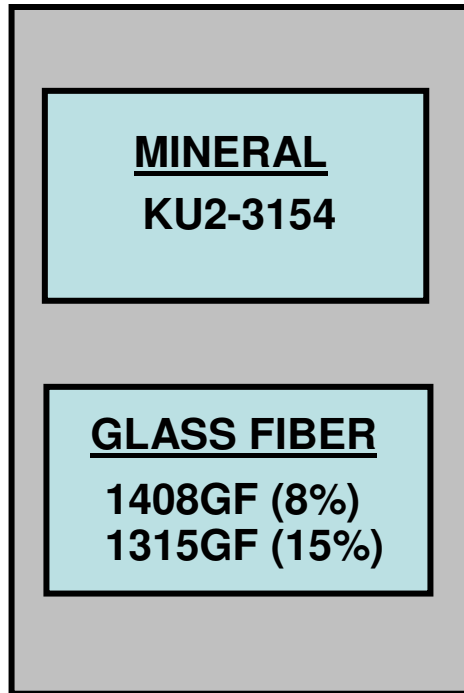

SPECIALTIES

