

**TECHNICAL DATA SHEET**

# Bakelite® UP 3720

Bakelite Synthetics

UP-X

**Processing**

Injection molding, Transfer molding

## Product Text

**Product Information**

**Product description:**

Polyester moulding compound, mainly organically filled, styrene free, very slight post shrinkage, very good electrical properties, very good sliding friction properties, dimensionally stable, UL listed moulding compound 0,8 mm / V1 (ALL), 1,5 mm / V-0 (ALL).

**Application areas:**

Bearings, guide rails, cross bars, micro switches, regulator switch cylinders.

Property Name	Value	Unit	Standard No.
Apparent density (moulding compound)	0.64	g/cm <sup>3</sup>	ISO 60
Moulding shrinkage (injection moulding, longitudinal)	0.75	%	ISO 2577
Post shrinkage (injection moulding, 168h/110°C)	0.15	%	ISO 2577
Moulding shrinkage (compression moulding, longitudinal)	0.35	%	ISO 2577
Post shrinkage (compression moulding, 168h/110°C)	0.1	%	ISO 2577
Tensile strength (5mm/min)	45	MPa	ISO 527-1/2
Compr. strength (test spec. flat tested)	150	MPa	ISO 604
Flexural strength (2mm/min)	90	MPa	ISO 178

# Bakelite® UP 3720

Bakelite Synthetics

Flexural modulus	8000	MPa	ISO 178
Ball indentation hardness (H 961/30)	250	MPa	ISO 2039/P1
Water absorption (24h/23°C)	50	mg	similar to ISO 62

Additional characteristics: low shrinkage/good dimensional stability, high arc resistance

## Preparation of Test Specimens of Thermosetting Moulding Compound

- Compression to ISO 295
- Injection to ISO 10724

## Storage capability

12 month (shorter shelf life for darker colours), (relative humidity of 50-60% and maximum storage temperature of approximately 20°C)

Processing/Physical Characteristics	Value	Unit	Standard
Molding shrinkage, parallel	0.75	%	ISO 294-4, 2577
Mechanical Properties	Value	Unit	Standard
Tensile modulus	9000	MPa	ISO 527
Poisson's ratio	0.35		ISO 527
Charpy impact strength, +23°C	9	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, +23°C	2.2	kJ/m <sup>2</sup>	ISO 179/1eA
Thermal Properties	Value	Unit	Standard
Temp. of deflection under load, 8.00 MPa	70	°C	ISO 75-1/-2
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.5	mm	
Yellow card available	yes		
Burning behav. at thickness h	V-1	class	IEC 60695-11-10
Thickness tested	0.8	mm	
Yellow card available	yes		
Electrical Properties	Value	Unit	Standard
Relative permittivity, 100Hz	5		IEC 62631-2-1
Dissipation factor, 100Hz	0.03	E-4	IEC 62631-2-1
Volume resistivity	1E10	Ohm*m	IEC 62631-3-1
Surface resistivity	1E11	Ohm	IEC 62631-3-2

# Bakelite® UP 3720

Bakelite Synthetics

Electrical Properties	Value	Unit	Standard
Electric strength	32.5	kV/mm	IEC 60243-1
Comparative tracking index	600		IEC 60112
Other Properties	Value	Unit	Standard
Density	1740	kg/m <sup>3</sup>	ISO 1183
Test Specimen Production	Value	Unit	Standard
Injection molding, injection temperature	105	°C	ISO 10724
Injection molding, injection velocity	170	mm/s	ISO 10724
Injection molding, hold pressure	100	MPa	ISO 10724
Injection molding, cure time	25	min	ISO 10724
Compression molding, mold temperature	160	°C	ISO 295
Compression molding, cure time	1	min	ISO 295


## Diagrams




# Bakelite® UP 3720

Bakelite Synthetics

Secant modulus-strain

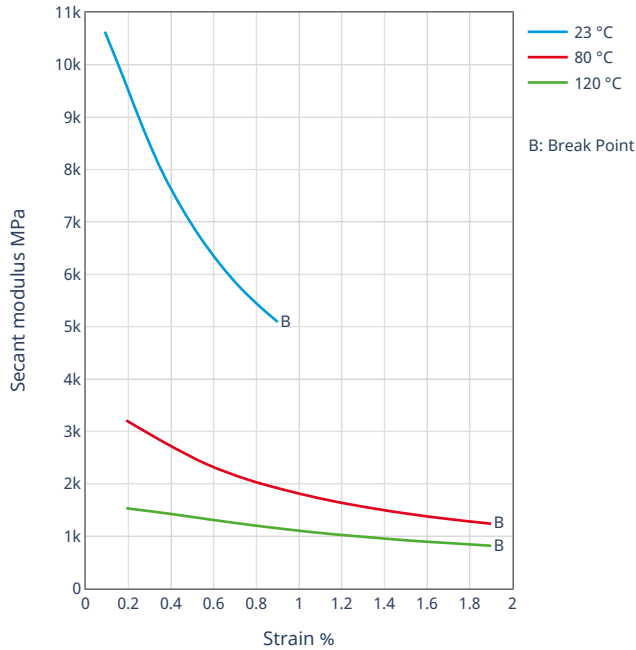

Dynamic shear modulus-temperature

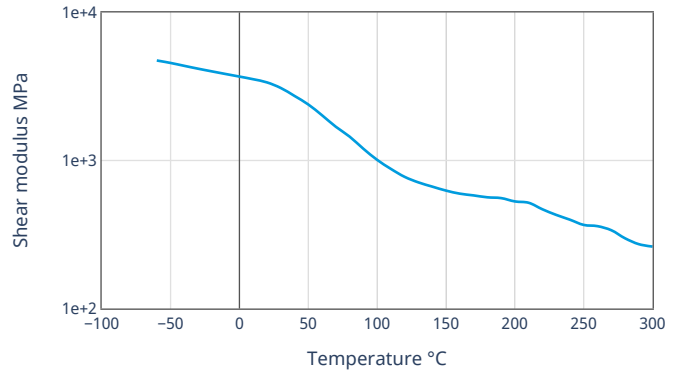

## Processing Information

### Injection molding

#### VERARBEITUNG

Temperature of material:	70 - 100	°C
Mould temperature:	160 - 180	°C
Curing time:	10-20	sec

#### Further Information:

#### Barrel temperature

- Feed zone:	60-70	°C
- Nozzle zone:	70-100	°C

Cavity moulding pressure: >10 MPa

Back pressure: 0.5-1 MPa

Holding pressure: 60% of injection pressure

### Compression molding

#### PROCESSING

Mould temperature:	160-180	°C
Curing time:	20-40	sec
Cavity moulding pressure:	>10	MPa