

Technical Data Sheet

Ronfalin ABS 1432 M

Acrylonitrile Butadiene Styrene

LyondellBasell Industries

Engineering Plastics

Product Description

Low gloss ABS with high heat resistance and good impact strength designed for injection molding of automotive interior applications. (Former name: RONFALIN 3325)

General

Processing Method	• Injection Molding
Resin ID (ISO 1043)	• ABS

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.05 g/cm ³	1.05 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	10 cm ³ /10min	10 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Stress (Yield)	6090 psi	42.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	3.0 %	3.0 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	4.8 ft·lb/in ²	10 kJ/m ²	
73°F (23°C)	8.1 ft·lb/in ²	17 kJ/m ²	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ISO 75-2/Af
264 Psi (1.8 Mpa), Unannealed	212 °F	100 °C	
Vicat Softening Temperature	216 °F	102 °C	ISO 306/B50
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index (Solution A)	600 V	600 V	IEC 60112
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 In (1.5 Mm)	HB	HB	
0.12 In (3.0 Mm)	HB	HB	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1290 °F	700 °C	
0.12 In (3.0 Mm)	1290 °F	700 °C	


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Ronfalin ABS 1432 M

Acrylonitrile Butadiene Styrene
LyondellBasell Industries
Engineering Plastics

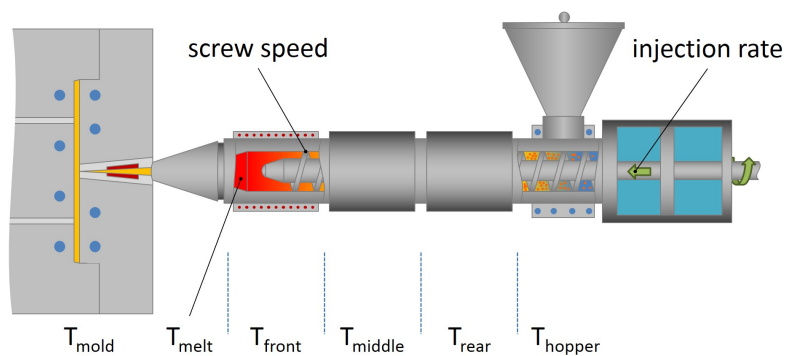

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	446 to 482 °F	230 to 250 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

Notes

These are typical property values not to be construed as specification limits.