

Technical Data Sheet

Gapex RPP20EA10BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

Product Description

Primary use is for structural or semi-structural applications, such as fender aprons.

General

Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Additive	• Heat Stabilizer
Features	• Chemically Coupled • Heat Stabilized
Uses	• Automotive Applications • Structural Parts
Appearance	• Black
Forms	• Pellets

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.05	1.05 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	4.8 g/10 min	4.8 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	8180 psi	56.4 MPa	ASTM D638
Flexural Modulus	522000 psi	3600 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	1.0 ft·lb/in	56 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	6.9 ft·lb/in	370 J/m	ASTM D4812
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	104	104	ASTM D785
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	311 °F	155 °C	
264 Psi (1.8 Mpa), Unannealed	282 °F	139 °C	


Additional Information

The value listed as Unnotched Izod Impact, ASTM D256, was tested in accordance with ASTM D4812.

Technical Data Sheet

Gapex RPP20EA10BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

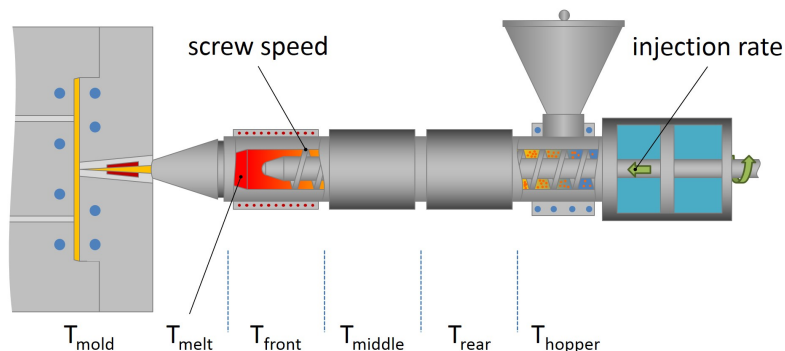

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	160 to 180 °F	71 to 82 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	430 to 460 °F	221 to 238 °C
Middle Temperature	440 to 470 °F	227 to 243 °C
Front Temperature	450 to 500 °F	232 to 260 °C
Nozzle Temperature	450 to 500 °F	232 to 260 °C
Processing (Melt) Temp	430 to 460 °F	221 to 238 °C
Mold Temperature	100 to 150 °F	38 to 66 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Cushion	0.200 to 0.500 in	5.08 to 12.7 mm

Notes

These are typical property values not to be construed as specification limits.