

Technical Data Sheet

POLYFORT® FPP 30T SHH K2362

Polypropylene Homopolymer
Engineering Plastics



Product Description

30% talc filled PP-Homopolymer with long term heat stabilization

General

Filler / Reinforcement	• Talc, 30% Filler by Weight
Features	• Heat Stabilized
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.15 g/cm³	1.15 g/cm³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (230°C/2.16 kg)	15 cm³/10min	15 cm³/10min	ISO 1133

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	537000 psi	3700 MPa	ISO 527-2/1A/1
Tensile Stress (Yield)	4350 psi	30.0 MPa	ISO 527-2/1A/50
Tensile Strain (Break)	2.8 %	2.8 %	ISO 527-2
Flexural Modulus	566000 psi	3900 MPa	ISO 178
Flexural Stress	7400 psi	51.0 MPa	ISO 178

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength (73°F (23°C))	1.4 ft·lb/in²	3.0 kJ/m²	ISO 179/1eA
Charpy Unnotched Impact Strength 73°F (23°C)	12 ft·lb/in²	25 kJ/m²	ISO 179/1eU

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Heat Deflection Temperature 264 psi (1.8 MPa), Unannealed	158 °F	70.0 °C	ISO 75-2/Af

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 in (2.00 mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 in (2.00 mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 in (1.5 mm)	HB	HB	
0.12 in (3.0 mm)	HB	HB	


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

POLYFORT® FPP 30T
SHH K2362

Polypropylene Homopolymer
Engineering Plastics

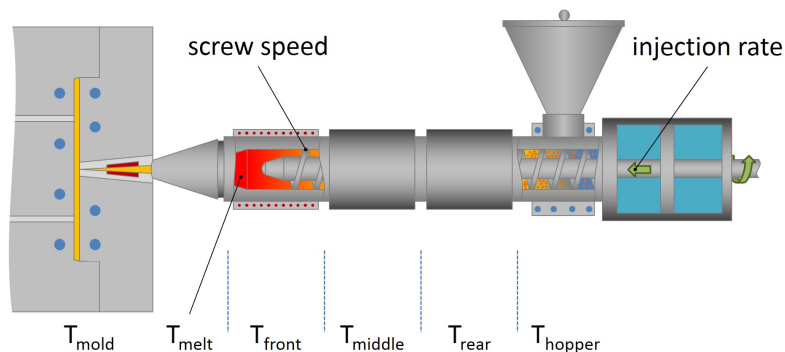

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Suggested Max Regrind	20 %	20 %
Processing (Melt) Temp	446 to 518 °F	230 to 270 °C
Mold Temperature	104 to 158 °F	40 to 70 °C

Injection Notes

Drying normally not necessary.

Injection molding parameters also influence emission properties, which are often required for automotive interior applications. Generally speaking, the emission, odor and fogging behavior of finished parts is improved by lowering the melt temperature, reducing residence time and avoiding high shear stress.

Notes

These are typical property values not to be construed as specification limits.