

VECTRA® B130

Liquid Crystal Polymer

Exceptional stiffness and strength with balance of properties similar to A130. Extremely low CLTE and shrinkage. Highest Limiting Oxygen Index. Some loss in flow compared to A130. 30% glass reinforced. Chemical abbreviation according to ISO 1043-1 : LCP Inherently flame retardant UL-Listing V-0 in natural and black at 0.43mm thickness per UL 94 flame testing. Relative-Temperature-Index (RTI) according to UL 746B: electrical 130 °C, mechanical 130 °C. UL = Underwriters Laboratories (USA)

Product information

Resin Identification	LCP-GF30	ISO 1043
Part Marking Code	>LCP-GF30<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.2 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	22000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	205 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1 %	ISO 527-1/-2
Flexural modulus	20000 MPa	ISO 178
Flexural strength	300 MPa	ISO 178
Compressive modulus	21500 MPa	ISO 604
Compressive stress at 1% strain	193 MPa	ISO 604
Tensile creep modulus, 1h	16000 MPa	ISO 899-1
Tensile creep modulus, 1000h	14100 MPa	ISO 899-1
Charpy impact strength, 23 °C	18 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	12 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23 °C	14 kJ/m ²	ISO 180/1A
Izod impact strength, 23 °C	15 kJ/m ²	ISO 180/1U
Hardness, Rockwell, M-scale	100	ISO 2039-2
Poisson's ratio	0.33 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10 °C/min	280 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	235 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	250 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	186 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h 50N	169 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	3 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	13 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Oxygen index	50 %	ISO 4589-1/-2

VECTRA® B130

Liquid Crystal Polymer

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	3.5	IEC 62631-2-1
Dissipation factor, 100Hz	100 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	80 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	>1E15 Ohm	IEC 62631-3-2
Electric strength	38 kV/mm	IEC 60243-1
Comparative tracking index	175	IEC 60112
Arc Resistance	124 s	UL 746B

Physical/Other properties

Density	1610 kg/m³	ISO 1183
---------	------------	----------

Injection

Drying Recommended	yes
Drying Temperature	150 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.01 %
Melt Temperature Optimum	290 °C
Min. melt temperature	280 °C
Max. melt temperature	315 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	80 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 150 MPa
Back pressure	3 MPa
Ejection temperature	239 °C

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	Flame retardant, Light stabilised or stable to light, High Flow

Additional information

Injection molding

Preprocessing

Vectra resins are well known for their excellent thermal and hydrolytic stability. In order to ensure these properties are optimum, the resin should be dried correctly prior to processing. Vectra B-grades should be dried at 150 C for a minimum of 6 hours in a desiccant dryer.

Processing

A three-zone screw evenly divided into feed, compression, and metering zones is

VECTRA® B130

Liquid Crystal Polymer

preferred. A higher percentage of feed flights may be needed for smaller machines: 1/2 feed, 1/4 compression, 1/4 metering.

Vectra LCPs are shear thinning, their melt viscosity decreases quickly as shear rate increases. For parts that are difficult to fill, the molder can increase the injection velocity to improve melt flow.

Processing Notes

Pre-Drying

VECTRA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -40^{\circ}\text{C}$. The time between drying and processing should be as short as possible.


Storage

For subsequent storage of the material in the dryer until processed the temperature does not need to be lowered for grades A, B, C, D and V ($\leq 24\text{ h}$).

VECTRA® B130

Liquid Crystal Polymer

Stress-strain

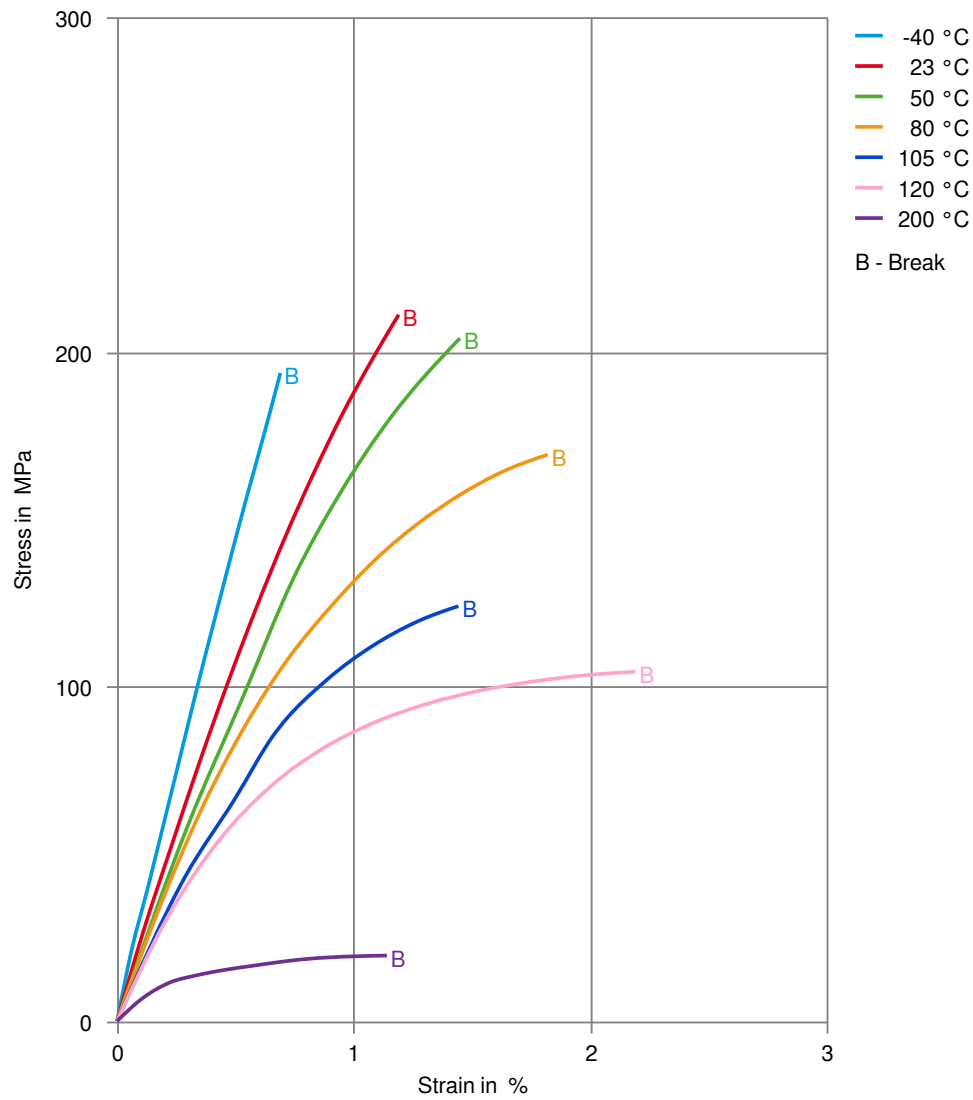

VECTRA® B130

Liquid Crystal Polymer

Secant modulus-strain

