

Technical Data Sheet



ALCOM LD2 PC 1000 UV 16032 WT1030-16

Base Polymer	Polycarbonate
Filler/Additive System	special filler
Market Segment	Automotive, Lighting
Application Area	lighting, light transparent components
Typical Applications	lamp covers, display elements, operating elements

Pre-Drying Conditions	120 °C in a dry air (dessiccant) dryer for 2-4 h 120 °C in an air circulating dryer for 4-12 h max. moisture content <0,02 %
-----------------------	--

Processing Injection Moulding	melt temperature 270-310 °C mould temperature 80-110 °C
-------------------------------	--

Storage	dry, protected from light
---------	---------------------------

Properties	Value	Dimension	Test Norm
Mechanical Properties			
Flexural Stress (3.5% Strain)	76	MPa	ISO 178
Tensile Modulus	2400	MPa	ISO 527
Tensile Stress at Yield	66	MPa	ISO 527
Tensile Elongation at Yield	6	%	ISO 527
Tensile Elongation at Break	70	%	ISO 527
Impact Strength (Charpy, 23°C)	no break	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy, -40°C)	no break	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy, 23°C)	14	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy, -40°C)	13	kJ/m ²	ISO 179/1eA
Thermal Properties			
Vicat B50	142	°C	ISO 306
HDT / A (1,8 MPa)	124	°C	ISO 75-1/-2
Rheological Properties			
Melt Index (MVR)	17	cm ³ /10min	ISO 1133
MVR temperature	300	°C	-
MVR load	1.2	kg	-
Physical Properties			
Density	1190	kg/m ³	ISO 1183
Flammability			
Flammability (0.75 mm)	V-2	class	UL 94
Yellow Card available	yes	-	-

Technical Data Sheet



ALCOM LD2 PC 1000 UV 16032 WT1030-16


Flammability (1.5 mm)	HB	class	UL 94
Yellow Card available	yes	-	-
Glow Wire (GWFI, 850°C, 2.0mm)	passed	-	DIN EN 60695

Optical Properties


Total Transmission T(Y) (d=1,0mm, A, 2°)	55	%	ISO 13468
Total Transmission T(Y) (d=2,0mm, A, 2°)	45	%	ISO 13468
Total Transmission T(Y) (d=3,0mm, A, 2°)	38	%	ISO 13468
Total Transmission T(Y) (d=4,0mm, A, 2°)	23	%	ISO 13468
Haze T(Y) (d=1,0 mm, A, 2°)	95.5	%	ISO 13468
Haze T(Y) (d=2,0 mm, A, 2°)	95.5	%	ISO 13468
Haze T(Y) (d=3,0 mm, A, 2°)	95.5	%	ISO 13468
Haze T(Y) (d=4,0 mm, A, 2°)	95.5	%	ISO 13468
Half Power Angle T(Y) (d=1,0mm, A, 2°, high res.)	57	°	-
Half Power Angle T(Y) (d=2,0mm, A, 2°, high res.)	61	°	-
Half Power Angle T(Y) (d=3,0mm, A, 2°, high res.)	63	°	-
Half Power Angle T(Y) (d=4,0mm, A, 2°, high res.)	65	°	-

Diagrams

Stress-Strain

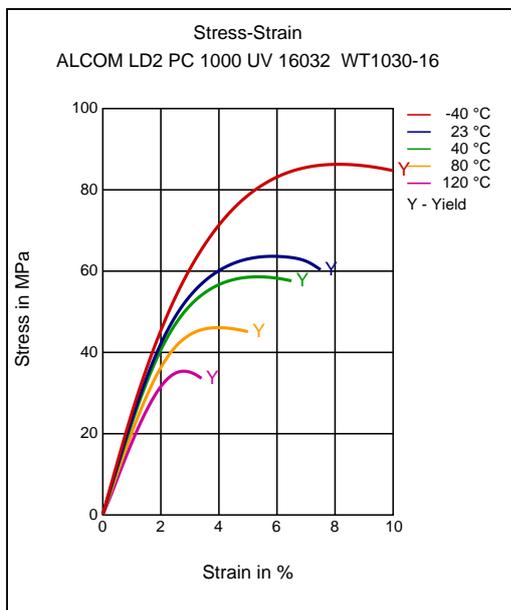

Angle dependent relative irradiance

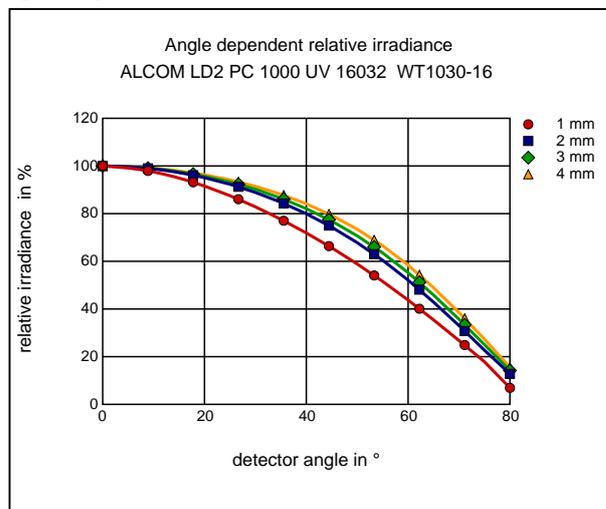

Technical Data Sheet

Alcom[®]

MOCOM

ALCOM LD2 PC 1000 UV 16032 WT1030-16

Spectrum

