

Zytel® 70G30HSLR BK186LM

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G30HSLR BK186LM is a 30% Glass Reinforced, Heat Stabilized, Hydrolysis Resistant and Laser Markable

Polyamide 66

Product information

Resin Identification	PA66-GF30	ISO 1043
Part Marking Code	>PA66-GF30<	ISO 11469
ISO designation	ISO 16396-PA66,GF30,M1CGHO2RW,S14-100	

Rheological properties

	dry/cond.		
Viscosity number	150 / *	cm ³ /g	ISO 307, 1628
Moulding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.0 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	10000 / 7000	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	190 / 130	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3 / 5	%	ISO 527-1/-2
Flexural modulus	9000 / 6500	MPa	ISO 178
Flexural strength	280 / 200	MPa	ISO 178
Charpy impact strength, 23°C	65 / 80	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	10 / 12	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	8 / -	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	10 / 12	kJ/m ²	ISO 180/1A
Poisson's ratio	0.34 / 0.35		

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	75 / 20	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	253 / *	°C	ISO 75-1/-2
Thermal conductivity of melt	0.22	W/(m K)	ISO 22007-2
Specific heat capacity of melt	2220	J/(kg K)	ISO 22007-4
RTI, electrical, 0.75mm	140	°C	UL 746B
RTI, electrical, 1.5mm	140	°C	UL 746B

Zytel® 70G30HSLR BK186LM

NYLON RESIN

RTI, electrical, 3.0mm	140	°C	UL 746B
RTI, impact, 0.75mm	125	°C	UL 746B
RTI, impact, 1.5mm	125	°C	UL 746B
RTI, impact, 3.0mm	125	°C	UL 746B
RTI, strength, 0.75mm	140	°C	UL 746B
RTI, strength, 1.5mm	140/*	°C	UL 746B
RTI, strength, 3.0mm	140	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB/*	class	IEC 60695-11-10
Thickness tested	1.5/*	mm	IEC 60695-11-10
UL recognition	yes ^{[1]/*}		UL 94
Burning Behav. at thickness h	HB/*	class	IEC 60695-11-10
Thickness tested	0.75/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
Oxygen index	24/*	%	ISO 4589-1/-2
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)
Hot Wire Ignition, 0.75mm	7/*	s	UL 746A
Hot Wire Ignition, 1.5mm	7/*	s	UL 746A
Hot Wire Ignition, 3mm	60/*	s	UL 746A

[1]: UL yellow card with (f1)

Electrical properties

	dry/cond.		
Comparative tracking index	400/-		IEC 60112
High Amperage Arc Ignition Resistance, 0.75 mm	120/*	arcs	UL 746A
High Amperage Arc Ignition Resistance, 1.5 mm	120/*	arcs	UL 746A
High Amperage Arc Ignition Category, 1.5 mm	120/*	class	UL 746A

Physical/Other properties

	dry/cond.		
Density	1370/-	kg/m ³	ISO 1183
Density of melt	1200	kg/m ³	

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	3 s/mm

Zytel® 70G30HSLR BK186LM

NYLON RESIN

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent
Special characteristics	Heat stabilised or stable to heat, Hydrolysis resistant


Automotive

OEM	STANDARD
Bosch	N28 BN02-GF053
Ford	WSS-M4D752-B1
Geely	Q/JL J124010-2019
Hyundai	MS211-47 Type A-2-3
Mercedes-Benz	DBL5406.21 PA66 GF30
Mercedes-Benz	DBL5406.22 PA66 GF30
Mercedes-Benz	DBL5408.45 PA66 GF30
Mercedes-Benz	DBL5409.24 PA66 GF30
Renault-Nissan	UB20a, No Spec, Special Part Approval, See Your CE Account Manager.
VW Group	TL 520 62 PA66-GF30
VW Group	TL 526 82 PA66-GF30
VW Group	VW 50127 PA66-7
VW Group	VW 50133 PA66-6-A

Zytel® 70G30HSLR BK186LM

NYLON RESIN


Viscosity-shear rate

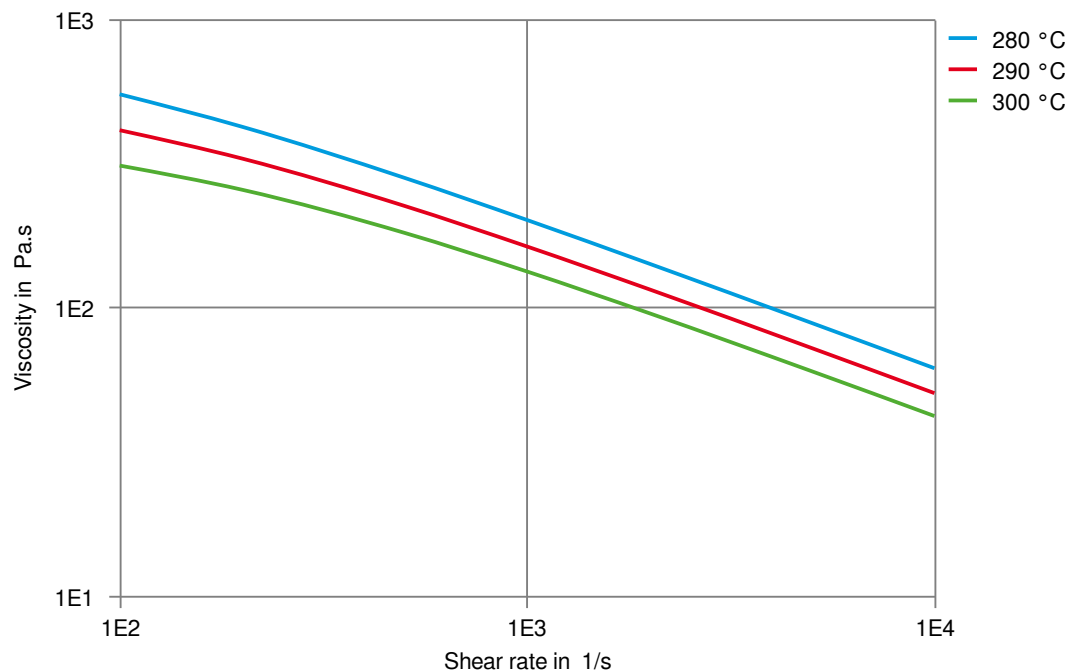

Zytel® 70G30HSLR BK186LM

NYLON RESIN

Shearstress-shear rate

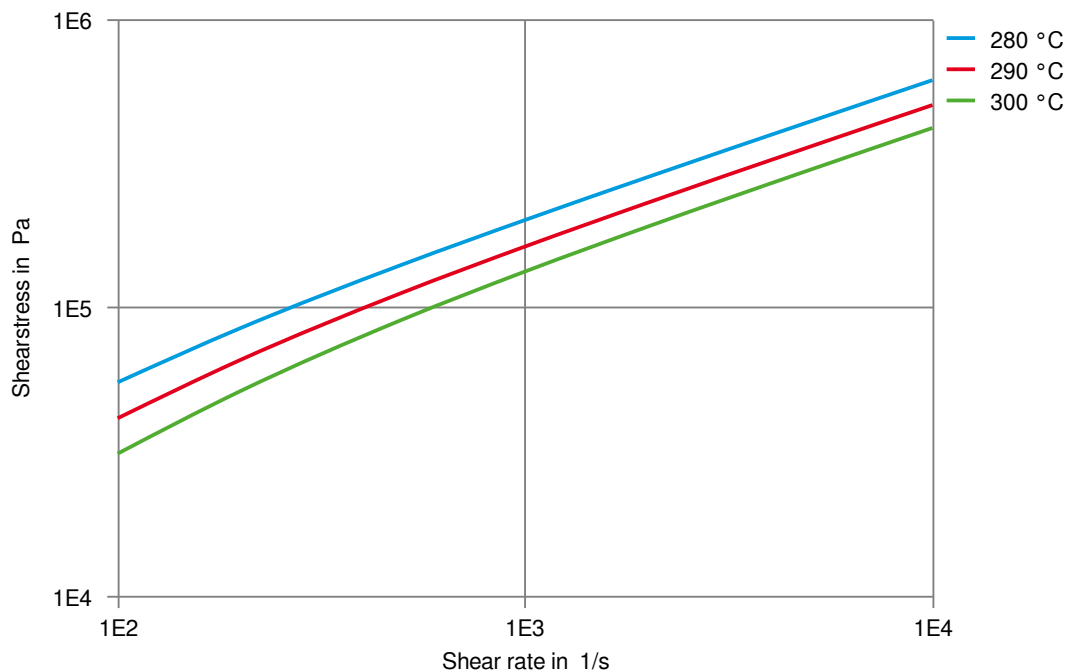

Zytel® 70G30HSLR BK186LM

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✓ Motor oil OS206 304 Ref.Eng.Oil, ISP, 135°C
- ✓ Automatic hypoid-gear oil Shell Donax TX, 135°C
- ✓ Hydraulic oil Pentosin CHF 202, 125°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Zytel® 70G30HSLR BK186LM

NYLON RESIN

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ DOT No. 4 Brake fluid, 120°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C
- ✓ Coolant Glysantin G48, 1:1 in water, 125°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).