

Rynite® RE5264E NC010

THERMOPLASTIC POLYESTER RESIN

Common features of Rynite® thermoplastic polyester include mechanical and physical properties such as excellent balance of strength and stiffness, dimensional stability, creep resistance, heat resistance, high surface gloss and good inherent electrical properties at elevated temperature. It can be processed over a broad temperature range and has excellent flow properties.

Rynite® thermoplastic polyester resins are typically used in demanding applications in the automotive, electrical and electronics, appliances where they successfully replace metals and thermosets, as well as other thermoplastic polymers.

Rynite® RE5264E NC010 is a 36% glass reinforced, modified polyethylene terephthalate resin developed for applications that need high burst strength.

Product information

Resin Identification	PET-GF36	ISO 1043
Part Marking Code	>PET-GF36<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.1 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.0 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	14000 MPa	ISO 527-1/-2
Stress at break, 5mm/min	200 MPa	ISO 527-1/-2
Strain at break, 5mm/min	2.4 %	ISO 527-1/-2
Flexural Modulus	12000 MPa	ISO 178
Flexural Strength	280 MPa	ISO 178
Charpy impact strength, 23°C	60 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	9.5 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.33	

Thermal properties

Melting temperature, 10°C/min	247 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	230 °C	ISO 75-1/-2

Electrical properties

Electric strength	21.5 kV/mm	IEC 60243-1
-------------------	------------	-------------

Rynite® RE5264E NC010

THERMOPLASTIC POLYESTER RESIN

Other properties

Density	1660 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Recommended	yes	
Drying Temperature	120 °C	
Drying Time, Dehumidified Dryer	4 - 6 h	
Processing Moisture Content	≤0.01 ^[1] %	
Melt Temperature Optimum	285 °C	Internal
Min. melt temperature	280 °C	
Max. melt temperature	300 °C	
Screw tangential speed	≤0.2 m/s	
Mold Temperature Optimum	140 °C	
Min. mould temperature	120 °C	
Max. mould temperature	140 ^[2] °C	
Hold pressure range	≥80 MPa	
Hold pressure time	4 s/mm	
Back pressure	As low as possible	
Ejection temperature	170 °C	Internal

[1]: At levels above 0.01%, strength and toughness will decrease, even though parts may not exhibit surface defects.

[2]: (6mm - 1mm thickness)


Characteristics

Additives	Release agent
-----------	---------------

Rynite® RE5264E NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain

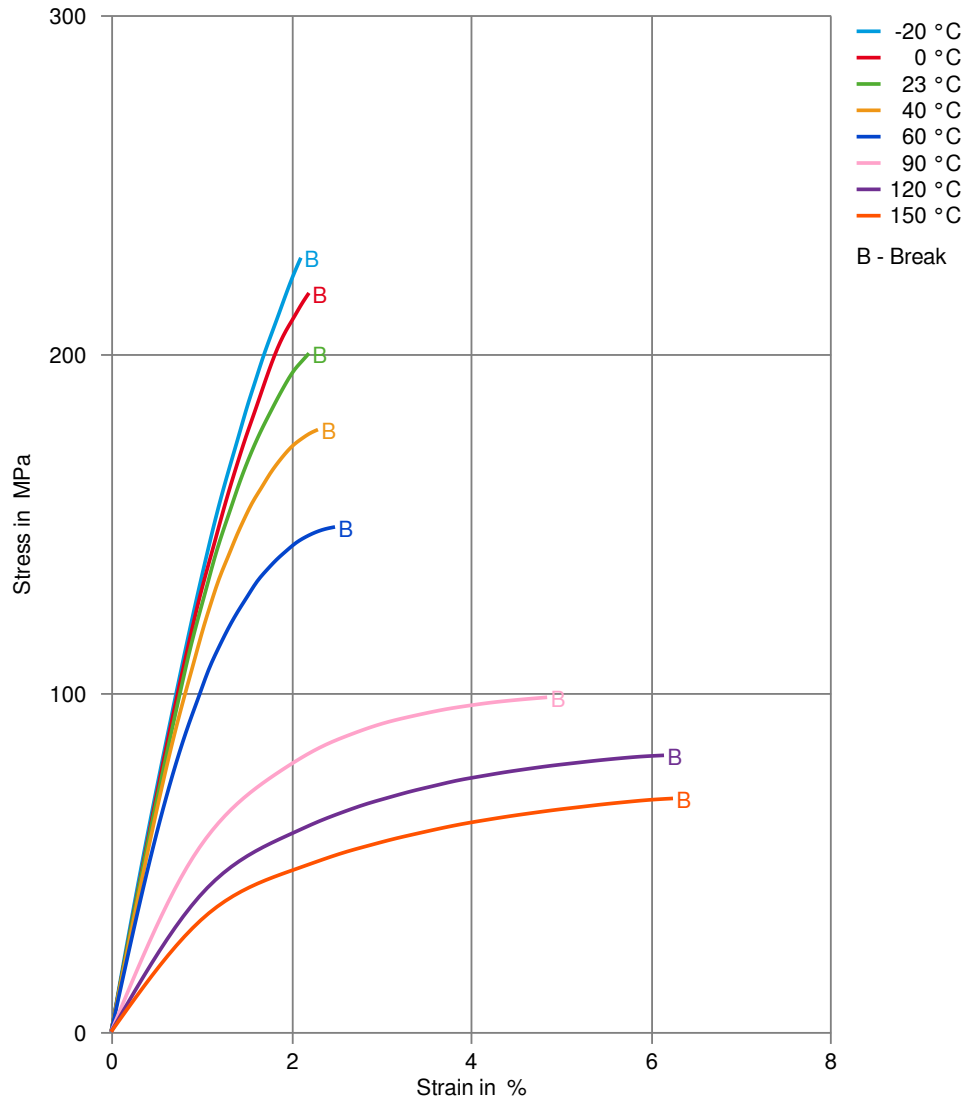

Rynite® RE5264E NC010

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

